



## Ventilated Down Draft Bench

- Heavy Duty Sheet Steel Construction
- Structural Steel Legs for Increased Weight Capacity
- Fiberglass Grated Work Deck
- Tapered Hopper Bottoms - Consistent airflow across the deck
- Heavy Weight Capacities
- Leveling Screws
- Single or Multiple Discharge Duct Connection Ports - Flanged
- Uniform Surface Velocities with Uniquely Designed Internal Baffle Assembly
- 2 FT – 10 FT Table Widths Standard, 2FT - 3FT Depths Standard
- Custom Sizes Available



(DuraBench VB2436)


## Ventilated Work Bench

DuraBench Ventilated Work Benches are utilized in conjunction with properly sized dust collection systems to provide additional ventilated work areas for hand grinding, polishing, sanding, cutting or other hand-held shop operations.

## DuraBench Optional Items

- Ceiling Panel
- LED Flush Lighting
- Face Shield
- Various Deck Materials
- Custom Sizing
- Side Exhaust

Internal Baffle Assembly  
for Uniform Surface Velocity

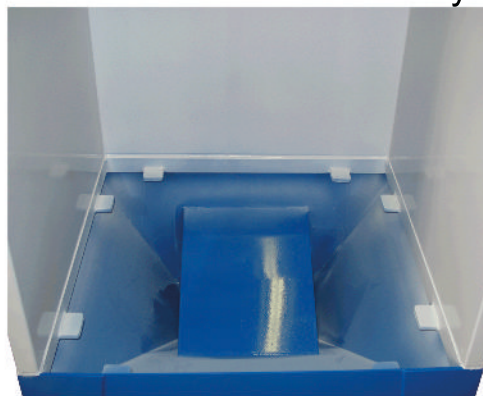

Standard  
Rear Exhaust

## DuraBench SPECIFICATIONS

Deck Size	CFM Requirement Based on 300 FPM at the Deck
24" x 36"	1,440
24" x 48"	1,920
24" x 60"	2,400
24" x 72"	2,880
24" x 84"	3,360
24" x 96"	3,840
24" x 108"	4,320
24" x 120"	4,800
24" x 132"	5,280
24" x 144"	5,760
36" x 36"	2,160
36" x 48"	2,880
36" x 60"	3,600
36" x 72"	4,320
36" x 84"	5,040
36" x 96"	5,760
36" x 108"	6,480
36" x 120"	7,200
36" x 132"	7,920
36" x 144"	8,640



# *ProVent*

## **MAIL**

**ProVent LLC**

**P.O. Box 223**

**Conway, Michigan 49722**

## **FACTORY**

**ProVent, LLC**

**670 W. Conway Rd.**

**Harbor Springs, MI 49740**

## **CONTACT**

**800-610-6010**

**SALES@PROVENTILATION.COM**

**PROVENTILATION.COM**

